


GB-38R, 36R, & 34R 500 Gallon PTO Powered **ORCHARD SPRAYER**



Option



Option

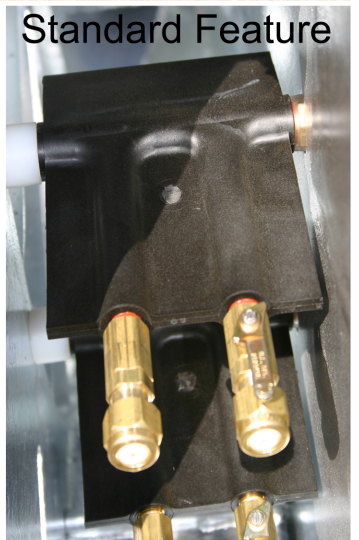

Standard Feature

2" Fill Front of Tank
W/Valve & Camlock

Myers 2-Stage Centrifugal Pump

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



GB-38R, 36R, & 34R 500 Gallon PTO DRIVE SPRAYER


STANDARD FEATURES

- DK turning hitch w/standard U-joint PTO shaft
- 500 Gallon 304 stainless steel tank
- 44 GPM / 600 PSI comet® diaphragm pump
- 38", 36", & 34" Reverse 8 blade axial flow steel fan
- M-55 Two speed gearbox w/neutral
- 55 series HD PTO shaft & HD size 6 tank driveline
- 1" 304 stainless steel mechanical agitation
- Dual or single hydraulic spray control valves
- 304 stainless steel strainers
- Teejet® TXR Conejet ceramic nozzles
- 13.5Lx16.1 ANS field and turf tire
- Galvanized fan housing
- Heavy duty adjustable hubs and spindles
- Composite nylon adjustable air vanes w/ specialty valves



OPTIONS

- Dual-port & Tri-port nozzle technology (simply better coverage)
- FieldIn® (fleet management/rate monitoring) AgOtter® (asset tracker/rate controller)
- Bravo 300 2, 4, & 6 zone tree targeting technology
- 600, 1,000, & 1,200 gallon machinery upgrades
- Indented tank for 10.00x15, 12.5L, and 13.5L tire packages
- Multiple tire configurations
- 2-point turning hitch
- 2" and 3" Stainless steel fill connections
- 100 GPM / 145 PSI Myers® 2-stage centrifugal pump
- 53 GPM / 600 PSI Comet® Pump (Model IDS 2200)
- Manual cable and electric controlled spray valves

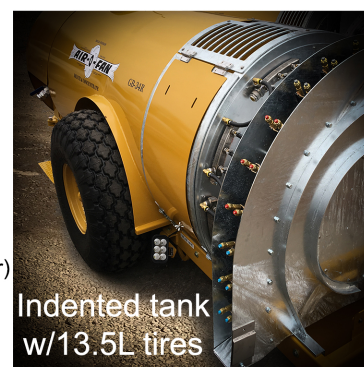

SPECIFICATIONS

Length.....500 Gal. = 15' 7" / 600 Gal. = 17'
 Width.....500 & 600 Gal. = 80"
 Height.....59" to 69"
 Weight.....500 Gal. = 3,200 lbs. / 600 Gal. = 3,350 lbs.
 Air velocity.....130 mph (approx.)



Visit our website: www.airofan.com