

H_{ERB}B_{ERM}-500 PTO POWERED HERBICIDE SPRAYER



Electronic Controls 36" Axial Steel Fan Blower Assembly

**Blower Front Panel
Assembly**

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



HERB-500


PTO DRIVE SPRAYER

STANDARD FEATURES

- 500 Gallon 304 stainless steel tank
- 14 GPM / 425 PSI comet diaphragm pump
- Hydraulic drive 1" 304 stainless mechanical agitation
- Electric KZ Co. pressure regulator w/three electric valves
- HD Weasler 55 series CV PTO shaft
- 14L x 16.1 ribbed implement tires
- HD Q821 hub and spindle package
- FMEB spray boom system
- 36" reverse fan steel axial flow blower housing w/ducting

OPTIONS

- 2" fill on rear tank head w/valve and male or female camlock
- AgOtter in-field data management rate controller (real-time available)
- 13.5 ANS turf tires

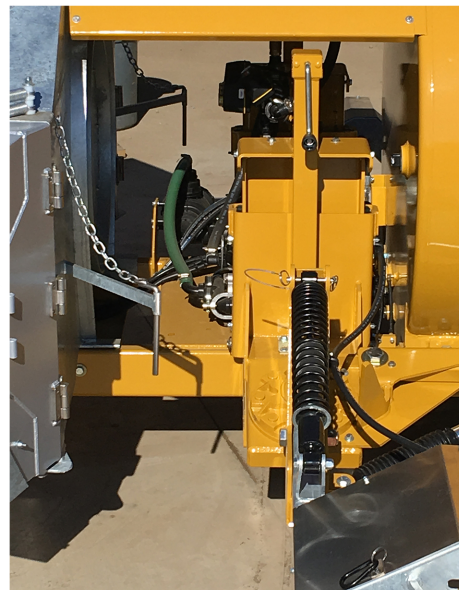

SPECIFICATIONS

Length.....17' 8"
Width.....80"
Height.....62"
Weight.....3,750 lbs.
PTO Horse Power Requirements...85 (minimum)



Visit Us: www.airofan.com