

NT-32R & S 400 PTO POWERED Models

ORCHARD SPRAYER



Standard Features: DK Turning Hitch, Comet APS-101 pump, reverse fan or outboard fan technologies, 11L ribbed implement tires, 32" steel axial flow fan assembly, TeeJet TXR ceramic conjet nozzles, & 304 stainless steel!

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



NT-32R & S 400 Gallon

PTO DRIVE SPRAYER

STANDARD FEATURES

- DK turning hitch
- 400 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 32" diameter, 9-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty standard U-joint PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Dual hydraulic spray control valves
- 304 stainless steel strainers (fill, suction, delivery)
- 11L x 15" 8 ply ribbed implement tires
- Heavy duty hubs and spindles w/3 position axle
- Galvanized fan housing
- Adjustable air vanes w/two inline nozzles per vane
- Teejet® Conjet ceramic nozzles

OPTIONS

- 2-Point turning hitch
- Double & single lip swivel hitches
- 36 GPM / 600 PSI Comet® diaphragm pump
- Electric spray control valves
- 2" and 3" Stainless steel fill connections
- Electric regulated pressure valve

SPECIFICATIONS

Length..... 14'5"

Width..... 65"



Height..... 54" (lowest) 58" (highest)

Weight..... 2,550 lbs. (R model) 2,450 (S model)


Air Velocity...125 MPH

PTO Horse Power Requirements...45-70

Top View

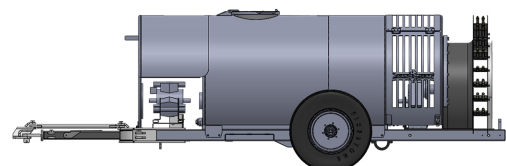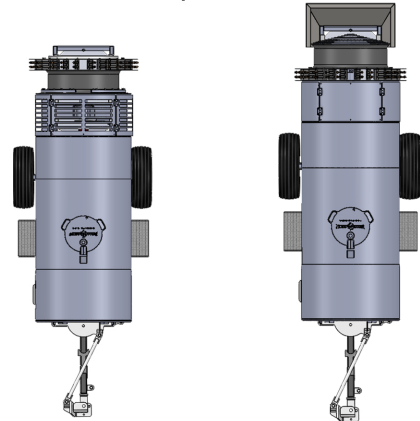

Side View

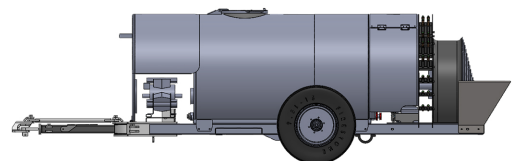

Visit us: www.airofan.com