

NT-32RT 500 Tower PTO POWERED ORCHARD SPRAYER



Air Restriction
Doors Standard

1215L Ribbed Tire Upgrade

*New ultra narrow
tower design, only 24" wide!*

Standard Features: DK Turning Hitch, Comet APS-101 pump, reverse fan technology, 11L ribbed implement tires, 12'6" narrow (24" wide) tower design, air restriction doors, 32" steel axial flow fan assembly, TeeJet TXR ceramic conjet nozzles, & 304 stainless steel!

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com




NT-32RT 500 Gallon

PTO DRIVE SPRAYER

STANDARD FEATURES

- DK turning hitch
- 500 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 32" diameter, 9-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Dual hydraulic spray control valves
- 304 stainless steel strainers (fill, suction, delivery)
- 11L x 15" 8 ply ribbed implement tires
- Heavy duty hubs and spindles w/3 position axle
- Galvanized fan housing w/limb deflection guard
- Adjustable air vanes w/two inline nozzles per vane
- Teejet® Conjet ceramic nozzles

Top View

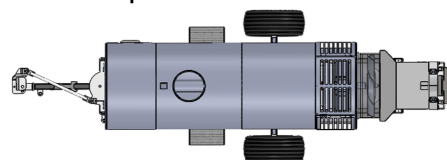

9-Blade "Reverse"
Steel Axial Flow Fan

OPTIONS

- 2-Point turning hitch
- Double & single lip swivel hitches
- 36 GPM / 600 PSI Comet® diaphragm pump
- Electric spray control valves
- 2" and 3" Stainless steel fill connections
- Electric regulated pressure valve

SPECIFICATIONS

Length..... 17'

Width..... 72"

Height..... 54" (Tank)...11'6" (Tower)

Weight..... 3,080 lbs.


Air Velocity...50 MPH

PTO Horse Power Requirements...45-70



Suction Doors
(Standard Feature)

Side View

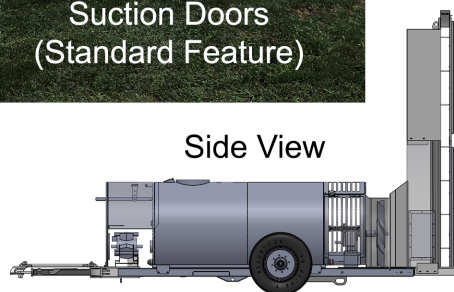

Visit us: www.airofan.com