



SE-30 300 PTO POWERED ORCHARD SPRAYER



Leaf Guard
Option

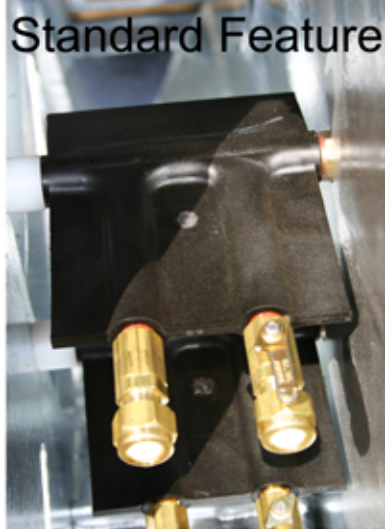

Standard Feature

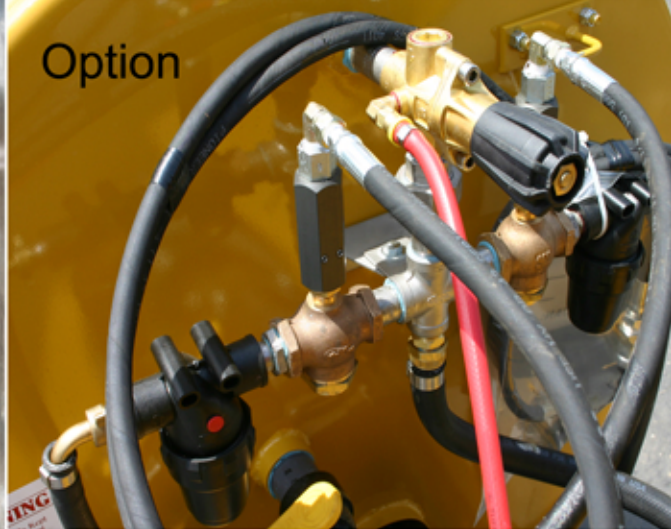

Option



Option

Adjustable Air Vanes

Dual Hydraulic Spray Valves

DK Turning Hitch

DAVIS & DAVIS DISTRIBUTORS
507 EAST DINUBA AVE. / REEDLEY, CA 93654 / (559) 638-6546
FAX (559) 638-9262 / VISIT OUR WEBSITE: WWW.AIROFAN.COM




SE-30 300

PTO DRIVE SPRAYER

STANDARD FEATURES

- 300 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 30" diameter, 6-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers (fill, suction, delivery)
- Teejet® stainless steel nozzles
- 9.50x15" ribbed implement tires
- Galvanized fan housing
- Composite nylon adjustable air vanes

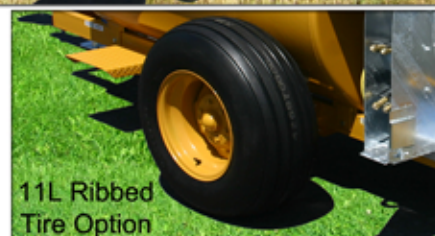

OPTIONS

- 32" fan housing upgrade (requires 45-75 PTO horse power)
- TeeJet® ceramic nozzles (conjet or disc & core)
- Hydraulic and electric control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard
- Tire and wheel exchange to 12.5Lx16.1" ribbed tires



SPECIFICATIONS

Length.....13'4"


Width.....52"

Height.....55" (Top of tank)

Weight.....1,140 lbs.

Air Velocity...120 MPH

PTO Horse Power Requirements...30-60

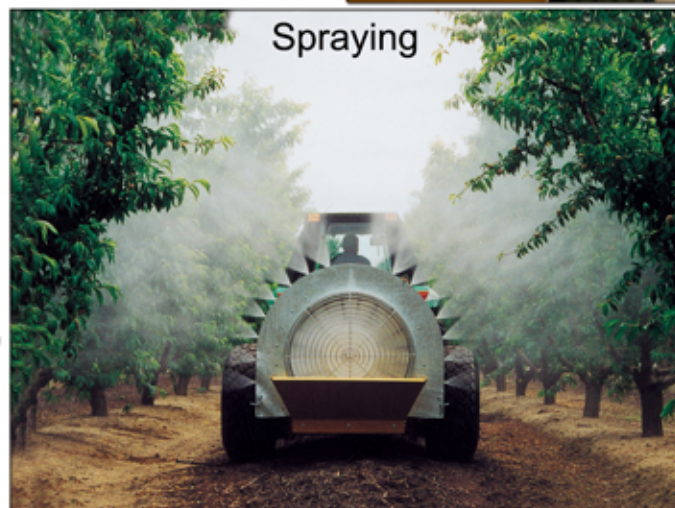

Visit our website: www.airofan.com